STORMTECH PRODUCT SPECIFICATIONS

1.0 GENERAL

1.1 STORMTECH CHAMBERS ARE DESIGNED TO CONTROL STORMWATER RUNOFF. AS A SUBSURFACE RETENTION SYSTEM, STORMTECH CHAMBERS RETAIN AND ALLOW EFFECTIVE INFILTRATION OF WATER INTO THE SOIL. AS A SUBSURFACE DETENTION SYSTEM, STORMTECH CHAMBERS DETAIN AND ALLOW FOR THE METERED FLOW OF WATER TO AN OUTFALL.

2.0 CHAMBER PARAMETERS

2.1 THE CHAMBER SHALL BE INJECTION MOLDED OF POLYPROPYLENE RESIN TO BE INHERENTLY RESISTANT TO ENVIRONMENTAL STRESS CRACKING (ESCR), AND TO MAINTAIN ADEQUATE STIFFNESS THROUGH HIGHER TEMPERATURES EXPERIENCED DURING INSTALLATION AND SERVICE.

2.2 THE NOMINAL CHAMBER DIMENSIONS OF THE STORMTECH SC-740 SHALL BE 30.0 INCHES (762 mm) TALL, 51.0 INCHES (1295 mm) WIDE AND 90.7 INCHES (2304 mm) LONG. THE NOMINAL CHAMBER DIMENSIONS OF THE STORMTECH SC-310 SHALL BE 16.0 INCHES (406 mm) TALL, 34.0 INCHES (864 mm) WIDE AND 90.7 INCHES (2304 mm) LONG. THE INSTALLED LENGTH OF A JOINED CHAMBER SHALL BE 85.4 INCHES (2169 mm).

2.3 THE CHAMBER SHALL HAVE A CONTINUOUSLY CURVED SECTION PROFILE.

2.4 THE CHAMBER SHALL BE OPEN-BOTTOMED.

2.5 THE CHAMBER SHALL INCORPORATE AN OVERLAPPING CORRUGATION JOINT SYSTEM TO ALLOW CHAMBER ROWS OF ALMOST ANY LENGTH TO BE CREATED. THE OVERLAPPING CORRUGATION JOINT SYSTEM SHALL BE EFFECTIVE WHILE ALLOWING A CHAMBER TO BE TRIMMED TO SHORTEN ITS OVERALL LENGTH.

2.6 THE NOMINAL STORAGE VOLUME OF A JOINED STORMTECH SC-740 CHAMBER SHALL BE 74.9 CUBIC FEET (2.1 m³) PER CHAMBER WHEN INSTALLED PER STORMTECH'S TYPICAL DETAILS (INCLUDES THE VOLUME OF CRUSHED ANGULAR STONE WITH AN ASSUMED 40 % POROSITY). THIS EQUATES TO 2.2 CUBIC FEET OF STORAGE/SQUARE FOOT (0.7 m³ OF STORAGE/SQUARE METER) OF BED. THE NOMINAL STORAGE VOLUME OF AN INSTALLED STORMTECH SC-310 CHAMBER SHALL BE 31.0 CUBIC FEET (0.9 m³) PER CHAMBER WHEN INSTALLED PER STORMTECH'S TYPICAL DETAILS (INCLUDES THE VOLUME OF CRUSHED ANGULAR STONE WITH AN ASSUMED 40% POROSITY). THIS EQUATES TO 1.3 CUBIC FEET OF STORAGE/SQUARE FOOT (0.4 m³ OF STORAGE/SQUARE METER) OF BED.

2.7 THE CHAMBER SHALL HAVE FORTY-EIGHT ORIFICES PENETRATING THE SIDEWALLS TO ALLOW FOR LATERAL CONVEYANCE OF WATER.

2.8 THE CHAMBER SHALL HAVE TWO ORIFICES NEAR ITS TOP TO ALLOW FOR EQUALIZATION OF AIR PRESSURE BETWEEN ITS INTERIOR AND EXTERIOR.

2.9 THE CHAMBER SHALL HAVE BOTH OF ITS ENDS OPEN TO ALLOW FOR UNIMPEDED HYDRAULIC FLOWS AND VISUAL INSPECTIONS DOWN A ROW'S ENTIRE LENGTH.

2.10 THE CHAMBER SHALL HAVE 14 CORRUGATIONS.

2.11 THE CHAMBER SHALL HAVE A CIRCULAR, INDENTED, FLAT SURFACE ON THE TOP OF THE CHAMBER FOR AN OPTIONAL 4-INCH (100 mm) INSPECTION PORT.

2.12 THE CHAMBER SHALL BE ANALYZED AND DESIGNED USING AASHTO METHODS FOR THERMOPLASTIC CULVERTS CONTAINED IN THE LRFD BRIDGE DESIGN SPECIFICATIONS, 2ND EDITION, INCLUDING INTERIM SPECIFICATIONS THROUGH 2001. DESIGN LIVE LOAD SHALL BE THE AASHTO HS20 TRUCK. DESIGN SHALL CONSIDER EARTH AND LIVE LOADS AS APPROPRIATE FOR THE MINIMUM TO MAXIMUM SPECIFIED DEPTH OF FILL.

2.13 THE CHAMBER SHALL BE MANUFACTURED IN AN ISO 9001:2000 CERTIFIED FACILITY.

3.0 END CAP PARAMETERS

3.1 END CAPS WITH PREFABRICATED PIPE CONNECTIONS SHALL BE INJECTION MOLDED FROM POLYETHYLENE RESIN.

3.2 THE END CAP SHALL BE DESIGNED TO FIT INTO ANY CORRUGATION OF A CHAMBER, WHICH ALLOWS: CAPPING A CHAMBER THAT HAS ITS LENGTH TRIMMED; SEGMENTING ROWS INTO STORAGE BASINS OF VARIOUS LENGTHS.

3.3 THE END CAP SHALL HAVE SAW GUIDES TO ALLOW EASY CUTTING FOR VARIOUS DIAMETERS OF PIPE THAT MAY BE USED TO INLET THE SYSTEM.

3.4 THE END CAP SHALL HAVE EXCESS STRUCTURAL ADEQUACIES TO ALLOW CUTTING AN ORIFICE OF ANY SIZE AT ANY INVERT ELEVATION.

3.5 THE PRIMARY FACE OF AN END CAP SHALL BE CURVED OUTWARD TO RESIST HORIZONTAL LOADS GENERATED NEAR THE EDGES OF BEDS.

3.6 THE END CAP SHALL BE MANUFACTURED IN AN ISO 9001:2000 CERTIFIED FACILITY.

1 STORMTECH PRODUCT SPECIFICATIONS

ACCEPTABLE FILL MATERIALS: STORMTECH SC-740 CHAMBER SYSTEMS

MATERIAL LOCATION	DESCRIPTION	AASHTO M43 DESIGNATION[1]	COMPACTION/DENSITY REQUIREMENT
Ⓓ FILL MATERIAL FOR LAYER 'D' STARTS FROM THE TOP OF THE 'C' LAYER TO THE BOTTOM OF FLEXIBLE PAVEMENT OR UNPAVED FINISH GRADE ABOVE. NOTE THAT PAVEMENT SUBBASE MAY BE PART OF THIS LAYER.	ANY SOILROCK MATERIALS, NATIVE SOILS, OR PER ENGINEER'S PLANS. CHECK PLANS FOR PAVEMENT SUBGRADE REQUIREMENTS.	N/A	PREPARE PER ENGINEER'S PLANS. PAVED INSTALLATIONS MAY HAVE STRINGENT MATERIAL AND PREPARATION REQUIREMENTS.
Ⓒ FILL MATERIAL FOR LAYER 'C' STARTS FROM THE TOP OF THE EMBEDMENT STONE ('B' LAYER) TO 18" [457 mm] ABOVE THE TOP OF THE CHAMBER. NOTE THAT PAVEMENT SUBBASE MAY BE A PART OF THIS LAYER.	GRANULAR WELL-GRADED SOIL/AGGREGATE MIXTURES, < 35% FINES. MOST PAVEMENT SUB-BASE MATERIALS CAN BE USED IN LIEU OF THIS LAYER.	3, 357, 4, 467, 5, 56, 57, 6, 67, 68, 7, 78, 8, 89, 9, 10	BEGIN COMPACTION AFTER 12" [305 mm] OF MATERIAL OVER THE CHAMBERS IS REACHED. COMPACT ADDITIONAL LAYERS IN 6" [152 mm] LIFTS TO A MIN. 95% STANDARD PROCTOR DENSITY. ROLLER GROSS VEHICLE WEIGHT NOT TO EXCEED 12,000 lbs [53 kN]. DYNAMIC FORCE NOT TO EXCEED 20,000 lbs [89 kN].
Ⓑ EMBEDMENT STONE SURROUNDING THE CHAMBERS FROM THE FOUNDATION STONE ('A' LAYER) TO THE 'C' LAYER ABOVE.	CLEAN, CRUSHED, ANGULAR STONE, NOMINAL SIZE DISTRIBUTION BETWEEN 3/4 - 2 INCH [19 - 51 mm]	3, 357, 4, 467, 5, 56, 57	NO COMPACTION REQUIRED.
Ⓐ FOUNDATION STONE BELOW CHAMBERS FROM THE SUBGRADE UP TO THE FOOT (BOTTOM) OF THE CHAMBER.	CLEAN, CRUSHED, ANGULAR STONE, NOMINAL SIZE DISTRIBUTION BETWEEN 3/4 - 2 INCH [19 - 51 mm]	3, 35, 4, 467, 5, 56, 57	PLATE COMPACT OR ROLL TO ACHIEVE IN 95% STANDARD PROCTOR DENSITY.

PLEASE NOTE:
1. THE LISTED AASHTO DESIGNATIONS ARE FOR GRADATIONS ONLY. THE STONE MUST ALSO BE CLEAN, CRUSHED, ANGULAR. FOR EXAMPLE, A SPECIFICATION FOR #4 STONE WOULD STATE: "CLEAN, CRUSHED, ANGULAR NO. 4 (AASHTO M43) STONE".

2. AS AN ALTERNATE TO PROCTOR TESTING AND FIELD DENSITY MEASUREMENTS ON OPEN GRADED STONE, STORMTECH COMPACTION REQUIREMENTS ARE MET FOR 'A' LOCATION MATERIALS WHEN PLACED AND COMPACTED IN 9" [229 mm] (MAX) LIFTS USING TWO FULL COVERAGES WITH AN APPROPRIATE COMPACTOR.

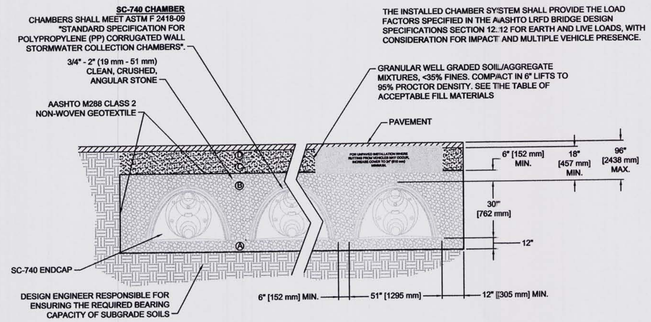

2 SC-740 STANDARD CROSS SECTION

NOT TO SCALE

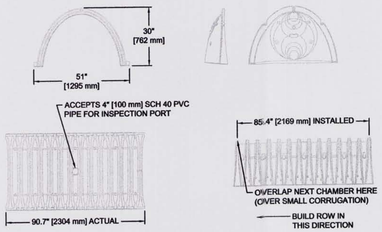

NOMINAL CHAMBER SPECIFICATIONS

SIZE (W x H x INSTALLED LENGTH)	51.0" x 30.0" x 85.4" [1295 mm x 762 mm x 2169 mm]
CHAMBER STORAGE	45.9 CUBIC FEET [1..30 m³]
MINIMUM INSTALLED STORAGE	74.9 CUBIC FEET [2.12 m³]
WEIGHT	75 lbs. [33.6 kg]

STUBS AT BOTTOM OF END CAP FOR PART NUMBERS ENDIING WITH "B"
STUBS AT TOP OF END CAP FOR PART NUMBERS ENDING WITH "T"

PART#	STUB	A	B	C
SC740EPE06T	6" [150 mm]	10.90" [277 mm]	18.50" [470 mm]	N/A
SC740EPE06B	6" [150 mm]	10.90" [277 mm]	N/A	0.50" [13 mm]
SC740EPE08T	8" [200 mm]	12.20" [310 mm]	16.50" [419 mm]	N/A
SC740EPE08B	8" [200 mm]	12.20" [310 mm]	N/A	0.60" [15 mm]
SC740EPE10T	10" [250 mm]	13.40" [340 mm]	14.50" [368 mm]	N/A
SC740EPE10B	10" [250 mm]	13.40" [340 mm]	N/A	0.70" [18 mm]
SC740EPE12T	12" [300 mm]	14.70" [373 mm]	12.50" [318 mm]	N/A
SC740EPE12B	12" [300 mm]	14.70" [373 mm]	N/A	1.20" [30 mm]
SC740EPE15T	15" [375 mm]	18.40" [467 mm]	9.00" [229 mm]	N/A
SC740EPE15B	15" [375 mm]	18.40" [467 mm]	N/A	1.30" [33 mm]
SC740EPE18T	18" [450 mm]	19.70" [500 mm]	5.00" [127 mm]	N/A
SC740EPE18B	18" [450 mm]	19.70" [500 mm]	N/A	1.60" [41 mm]
*SC740EPE24B	24" [600 mm]	18.50" [470 mm]	N/A	0.10" [3 mm]

NOTE: ALL DIMENSIONS ARE NOMINAL

ALL STUBS, EXCEPT FOR THE SC740EPE24B ARE PLACED AT BOTTOM OF END CAP SUCH THAT THE OUTSIDE DIAMETER OF THE STUB IS FLUSH WITH THE BOTTOM OF THE END CAP. FOR ADDITIONAL INFORMATION CONTACT STORMTECH AT 1-888-892-2694.

*FOR THE SC740EPE24B THE 24" [600 mm] STUB LIES BELOW THE BOTTOM OF THE END CAP APPROXIMATELY 1.75" [44 mm]. BACKFILL MATERIAL SHOULD BE REMOVED FROM BELOW THE N-12 STUB SO THAT THE FITTING SITS LEVEL.



3 SC-740 TECHNICAL SPEC.

NOT TO SCALE

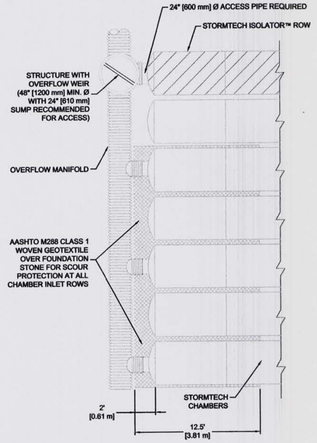

4 SC-740 MAINIFOLD DETAIL

NOT TO SCALE

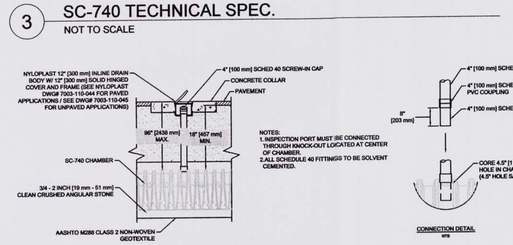

6 SC-740 INSPECTION PORT DETAIL

NOT TO SCALE

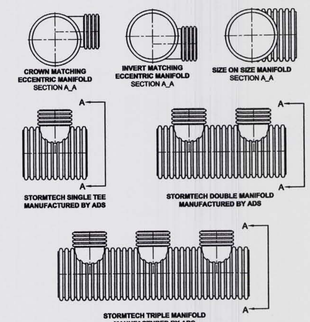

STUB SIZE	HEADER PIPE SIZES								
	12"	15"	18"	24"	30"	36"	42"	48"	60"
24"	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	-	-	-	-
18"	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	-	-	-
15"	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	-	-
12"	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	-
10"	-	-	-	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL
8"	-	-	-	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL
6"	-	-	-	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL	AVAIL

AVAIL - STANDARD HEADERS AVAILABLE

ADS 1-800-821-6710

MANIFOLDS ARE DESIGNED TO BE COUPLED TO STORMTECH PREFABRICATED END CAPS. WHEN USING STANDARD END CAPS, CORRUGATED PIPE UP TO 18 INCHES CAN BE INSERTED DIRECTLY INTO THE END CAP. FOR 24" INLET PIPES, A CORRUGATED TO SMOOTH PIPE ADAPTER IS REQUIRED.

7 MANIFOLDS

NOT TO SCALE

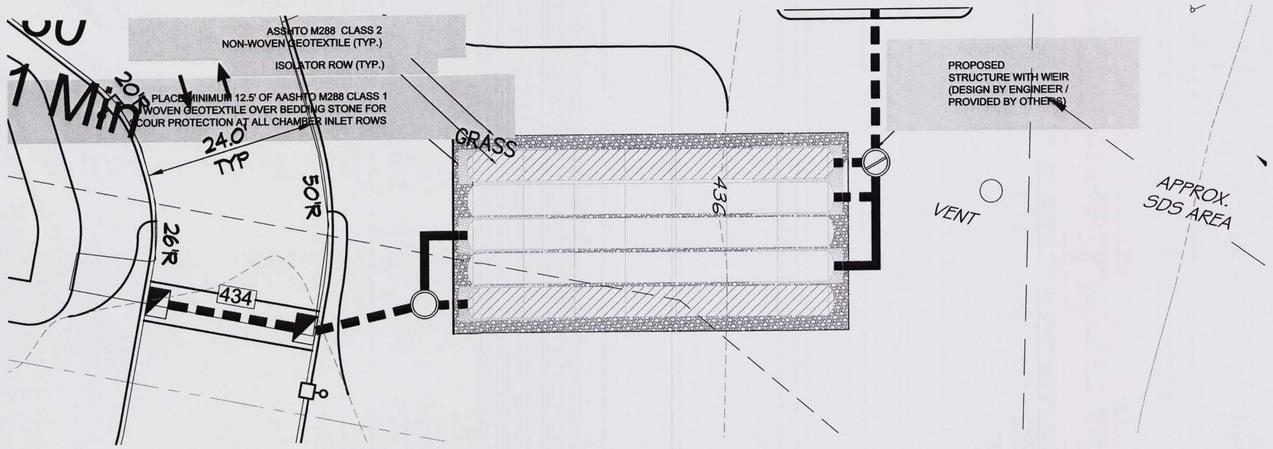

8 STORMTECH LAYOUT

SCALE: 1"=10'

1. ALL DESIGN SPECIFICATIONS FOR STORMTECH SC-740 CHAMBERS SHALL BE IN ACCORDANCE WITH THE STORMTECH DESIGN MANUAL
2. THE INSTALLATION OF STORMTECH SC-740 CHAMBERS SHALL BE IN ACCORDANCE WITH THE LATEST STORMTECH INSTALLATION INSTRUCTIONS
3. THE CONTRACTOR IS ADVISED TO REVIEW AND UNDERSTAND THE INSTALLATION INSTRUCTIONS PRIOR TO BEGINNING SYSTEM INSTALLTION. CALL **1-888-892-2694** OR VISIT **WWW.STORMTECH.COM** TO RECIEVE A COPY OF THE LATEST STORMTECH INSTALLTION INSTRUCTIONS
4. CHAMBERS SHALL MEET THE DESIGN REQUIREMENTS AND LOAD FACTORS SPECIFIED IN SECTION 12.12 OF THE LATEST EDITION OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS

9 SC-740 NOTES

StormTech®
Detention • Retention • Recharge
Subsurface Stormwater Management℠

D.C. ENGINEERING, PC
JOHN A. KALIN, PE
NYS LIC. NO 070924
OFFICE: 3 MEMORIAL AVE. PAWLING, NY 12564
PHONE: (845) 855-2000
FAX: (845) 855-2605
EMAIL: JKALIN@VERIZON.NET

NO.	BY	REVISION	DATE

PROJ: DOVER MOBIL — NYS RTE 22, TOWN OF DOVER, DUTCHESS COUNTY, NY 12522

DWG: STORMTECH DETAIL SHEET

SCALE: NOTED	DATE: JAN. 11, 2011	SHT NO. 5 OF 8	DWG NO: C-520
DRN BY: JAK	CHK'D BY: JK	PROJ: 011111	