
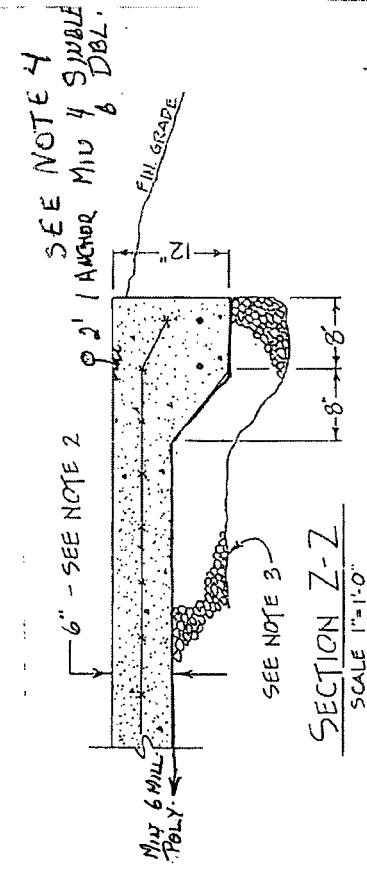


Mobile Home Foundation Plan

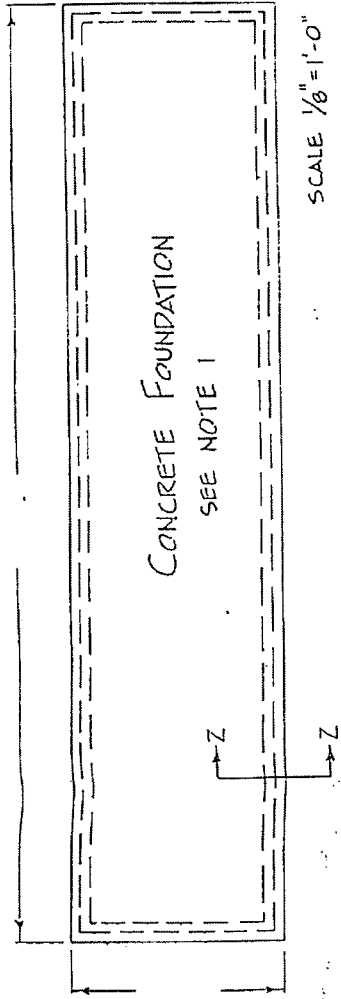

NOTES:

1. Concrete foundation to be 12" haunched slab constructed of concrete with a minimum compression strength of 3500 PSI at 14 days. Maximum size aggregate shall be 1" with a maximum slump of 4".
2. Concrete slab to be reinforced with 6x6 #8 wire mesh centered vertically and wrapped under (2) #4 rebars (running continuously around perimeter).
3. Foundation shall bear on properly compacted structural fill, to consist of 6" thick select granular materials.
4. Minimum 4 anchors for single wide as per manufacturer placement requirements.

All work shall conform to the latest edition of the New York State Building Code (NYSUFP & BC)